


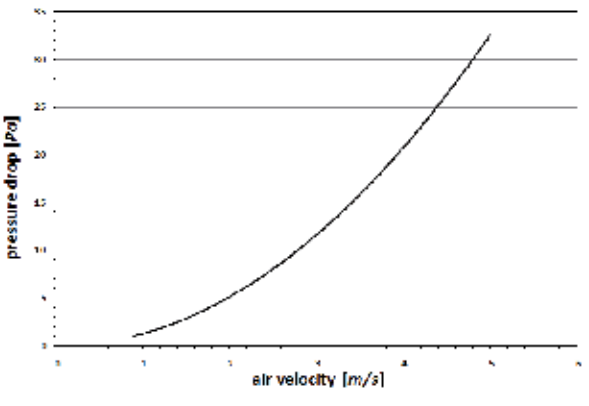
Drift Eliminators

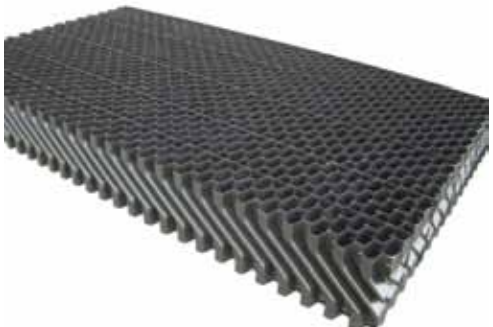
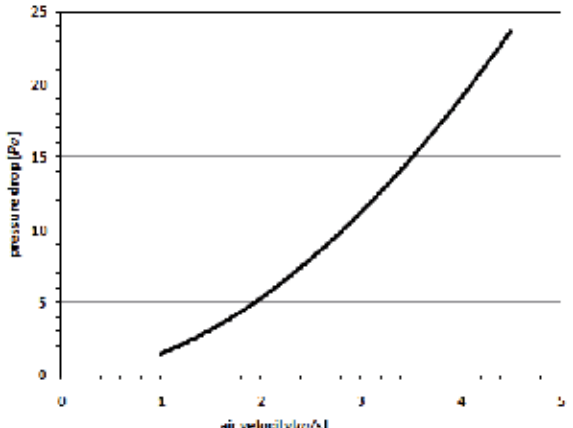
in PP + PVC + PVDF



extract of applications:

- **cooling towers**
- **HVAC**
- **gas scrubbers and columns**
- **greenhouses and farmhouses**

blade eliminators	DEP 156, DEP 177, DEP 187	
openings / distances:	33, 38 and 44mm others on request	
standard dimensions : LxW [mm]	endless length x width: 156, 177, 187	
temperature range [°C]	-20 to 80 others on request	
material	PP, PVC	

cellular eliminator	DEP 125 EUROVENT, Paris certified: Drift rate < 0.0005%,	
openings / distances:	≈ 34 mm	
standard dimensions : LxW [mm]	2400 x 600 x 125	
temperature range [°C]	-20 to 80 others on request	
material	PP, PVC	

Please contact us for further informations!